

Fig. 2

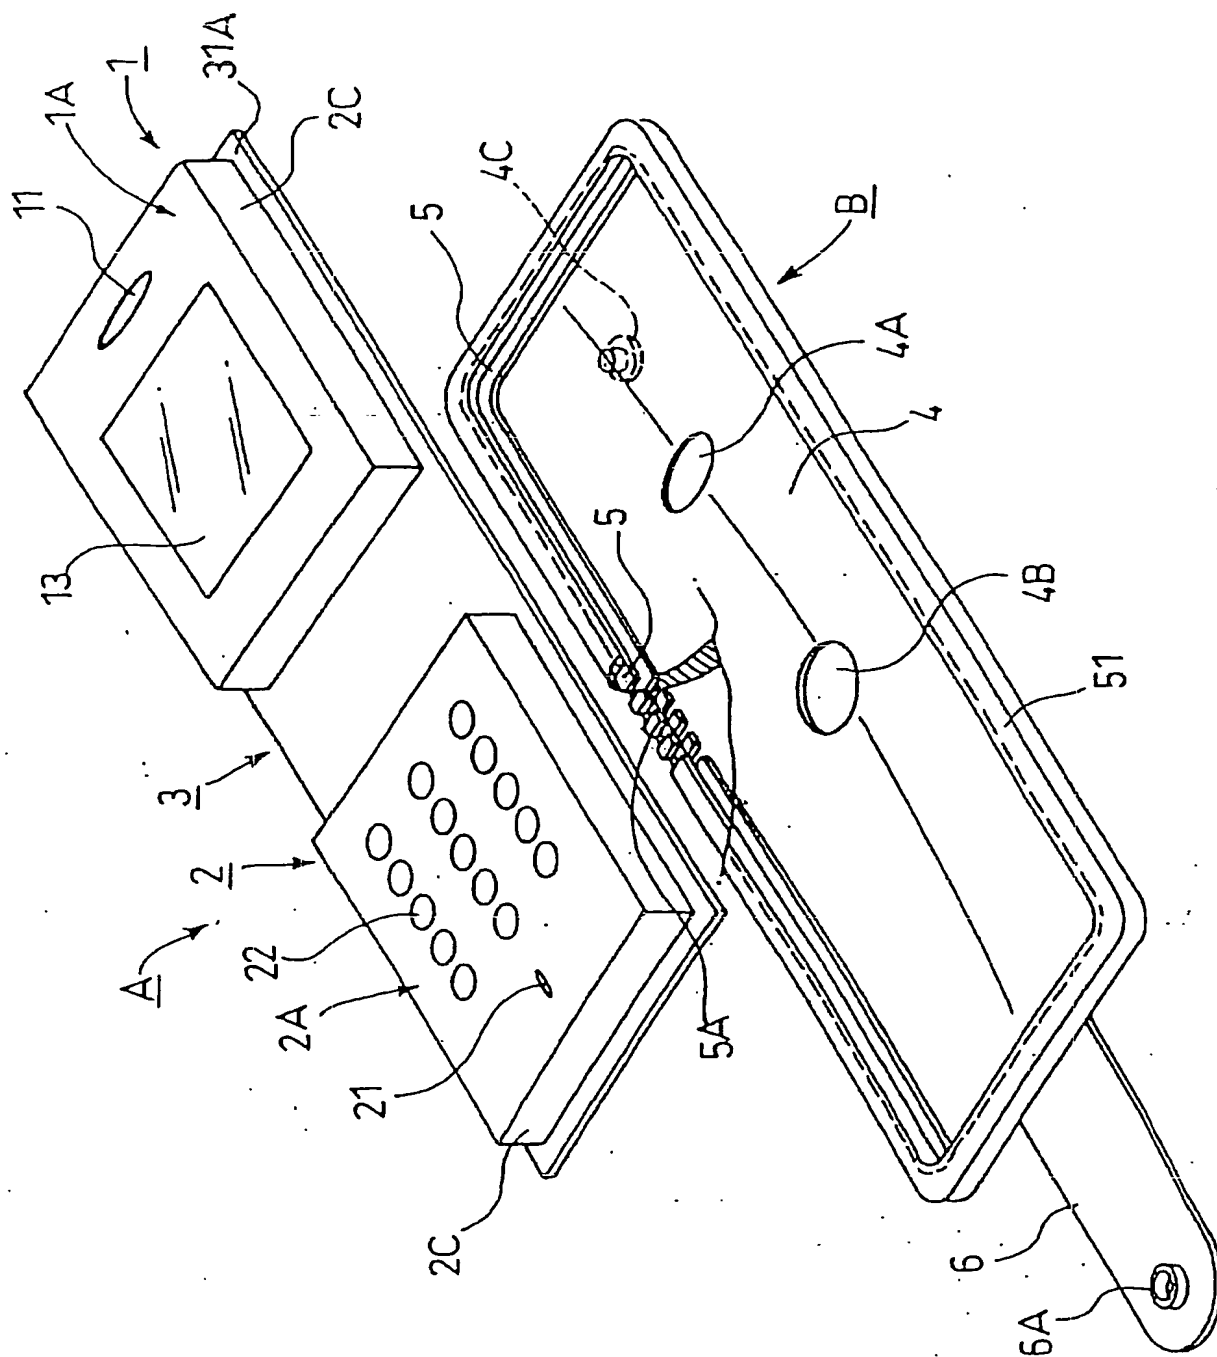


Fig 3

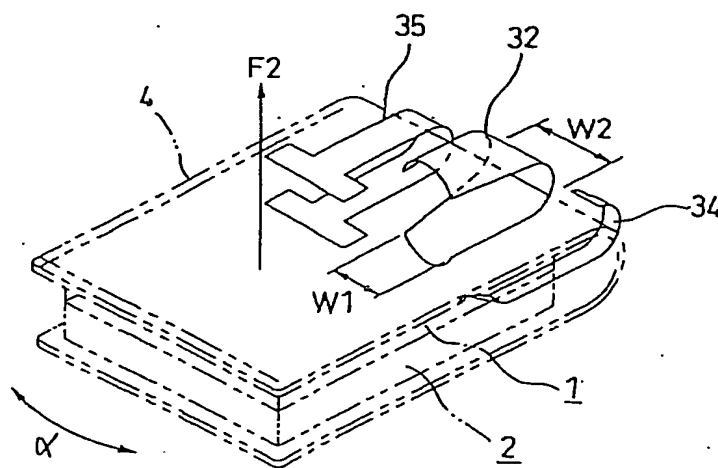
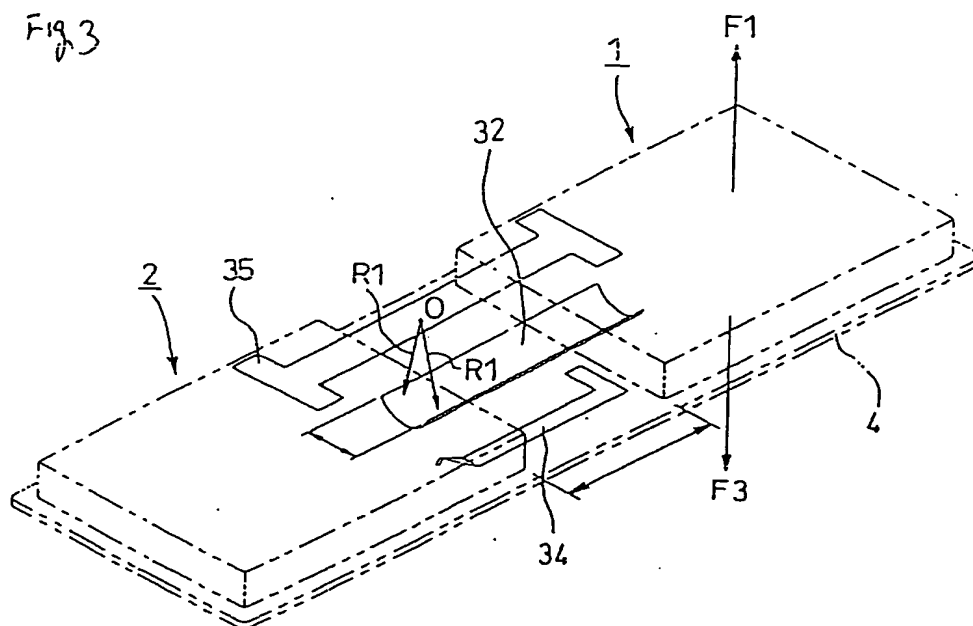


Fig. 4

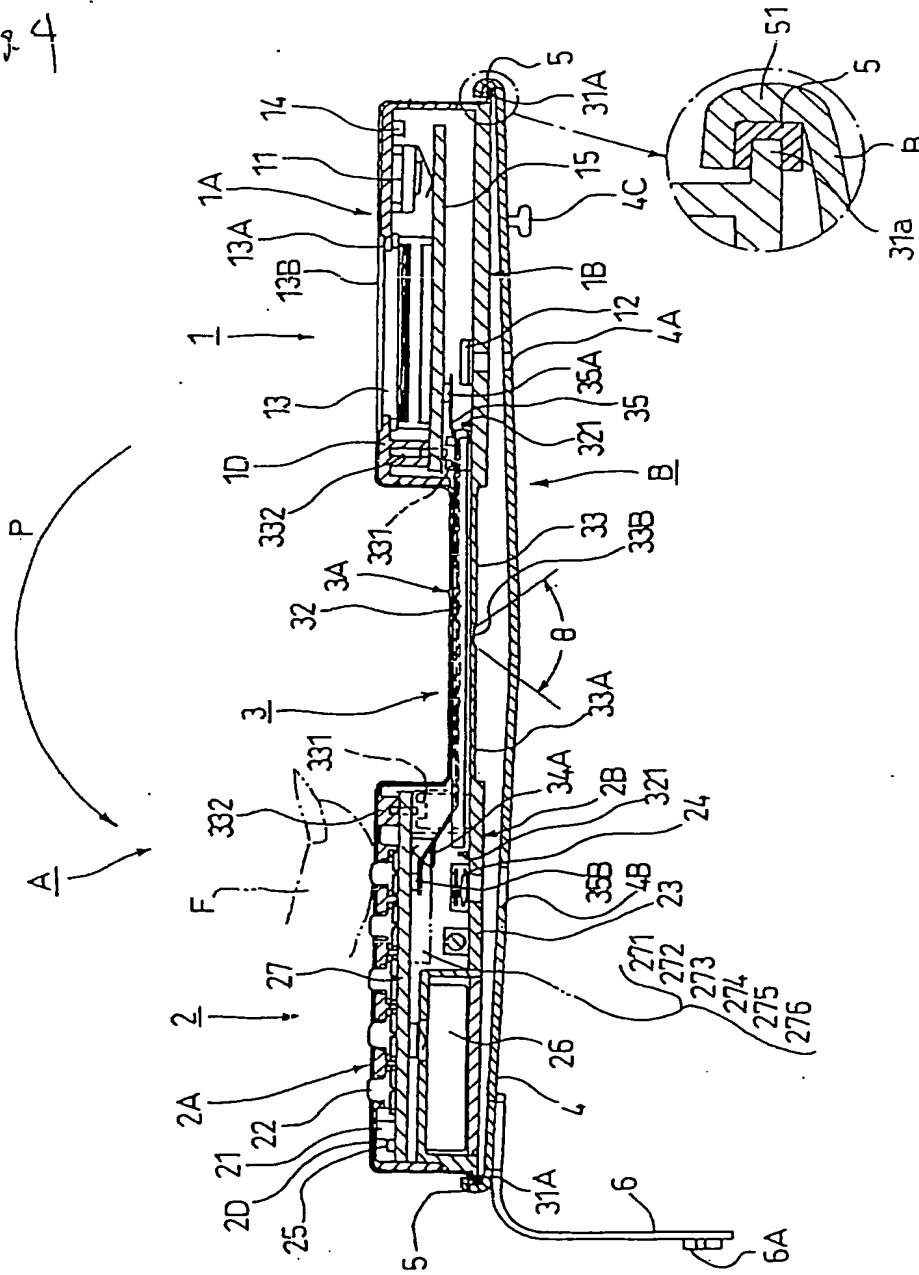


Fig. 5

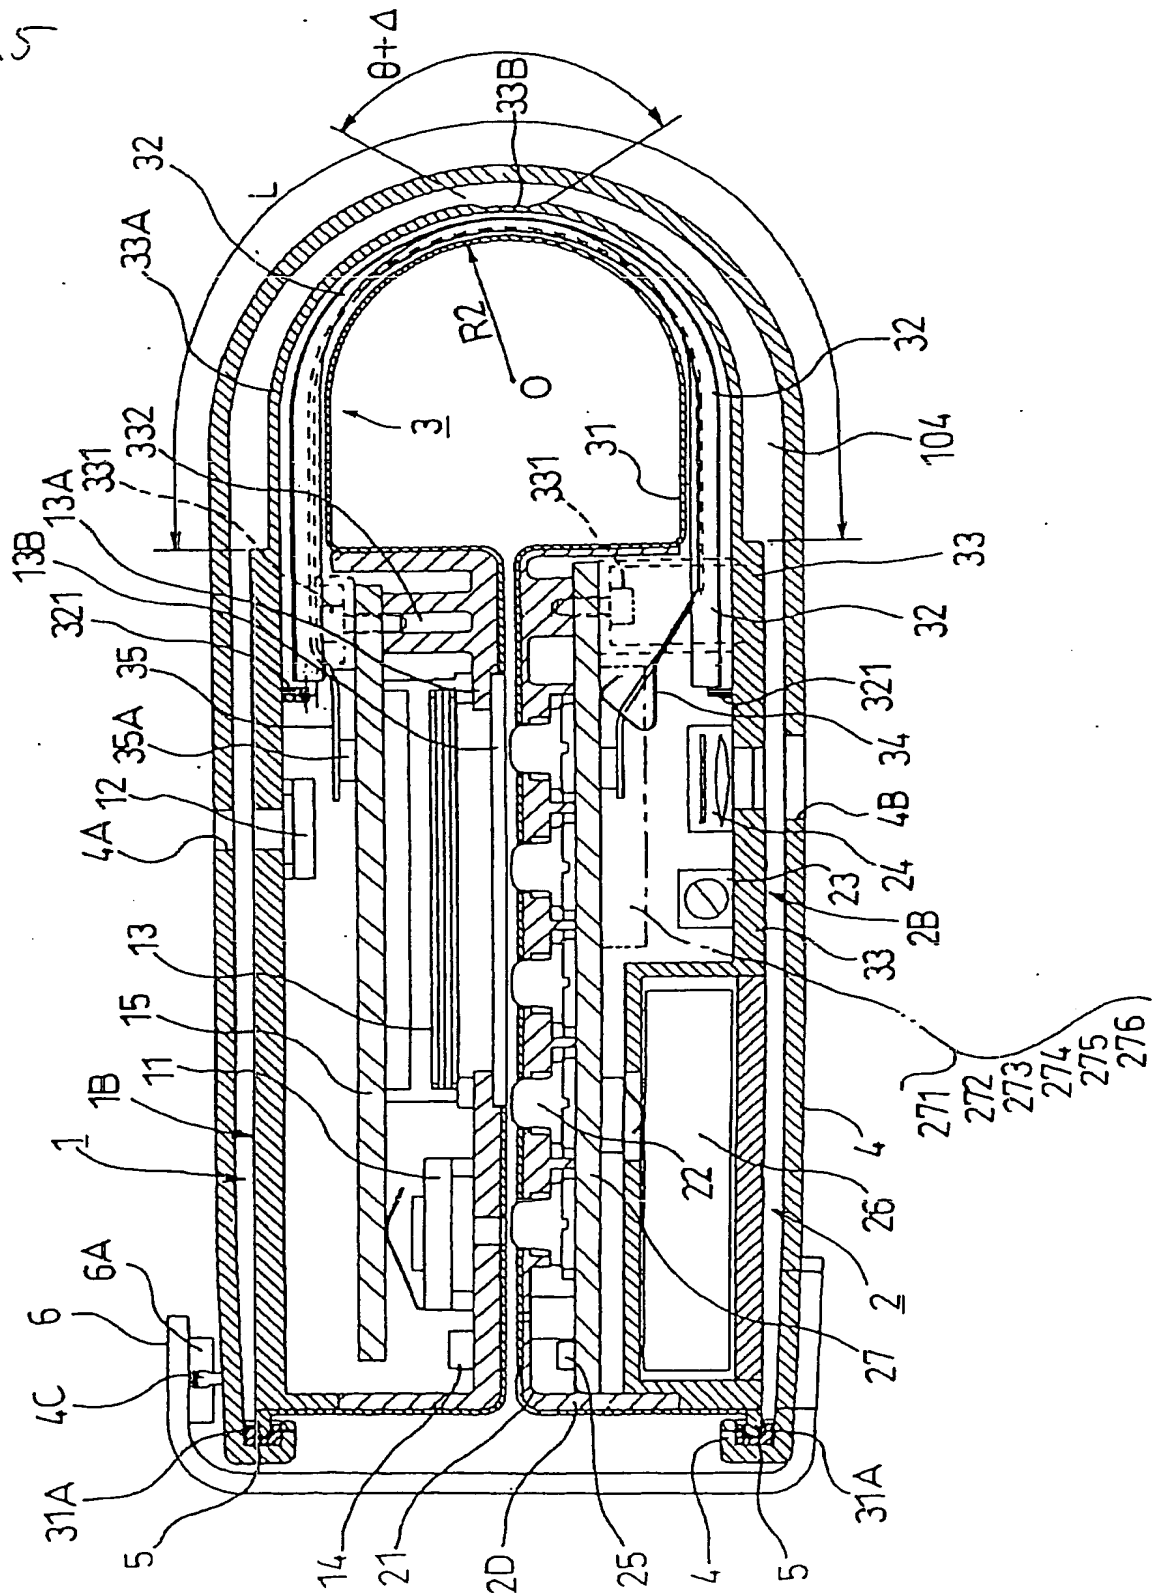


Fig. 6

6/16

Customer No.: 52054
Application No.: TBD
Applicant: Noriyoshi Sato et al.
Atty. Docket No.: 40271

- 11: RECEIVER
- 12: SPEAKER
- 13: DISPLAY UNIT
- 21: MICROPHONE
- 22: OPERATING UNIT
- 23: VIBRATOR UNIT
- 24: CAMERA UNIT
- 25: HALL ELEMENT
- 26: CELL
- 34: ANTENNA
- 270: CONTROL UNIT
- 271: TRANSMITTING/RECEIVING UNIT
- 272: DATA CONVERTING UNIT
- 273: VOICE PROCESSING UNIT
- 274: IMAGE PROCESSING UNIT
- 275: INFORMATION STORAGE UNIT

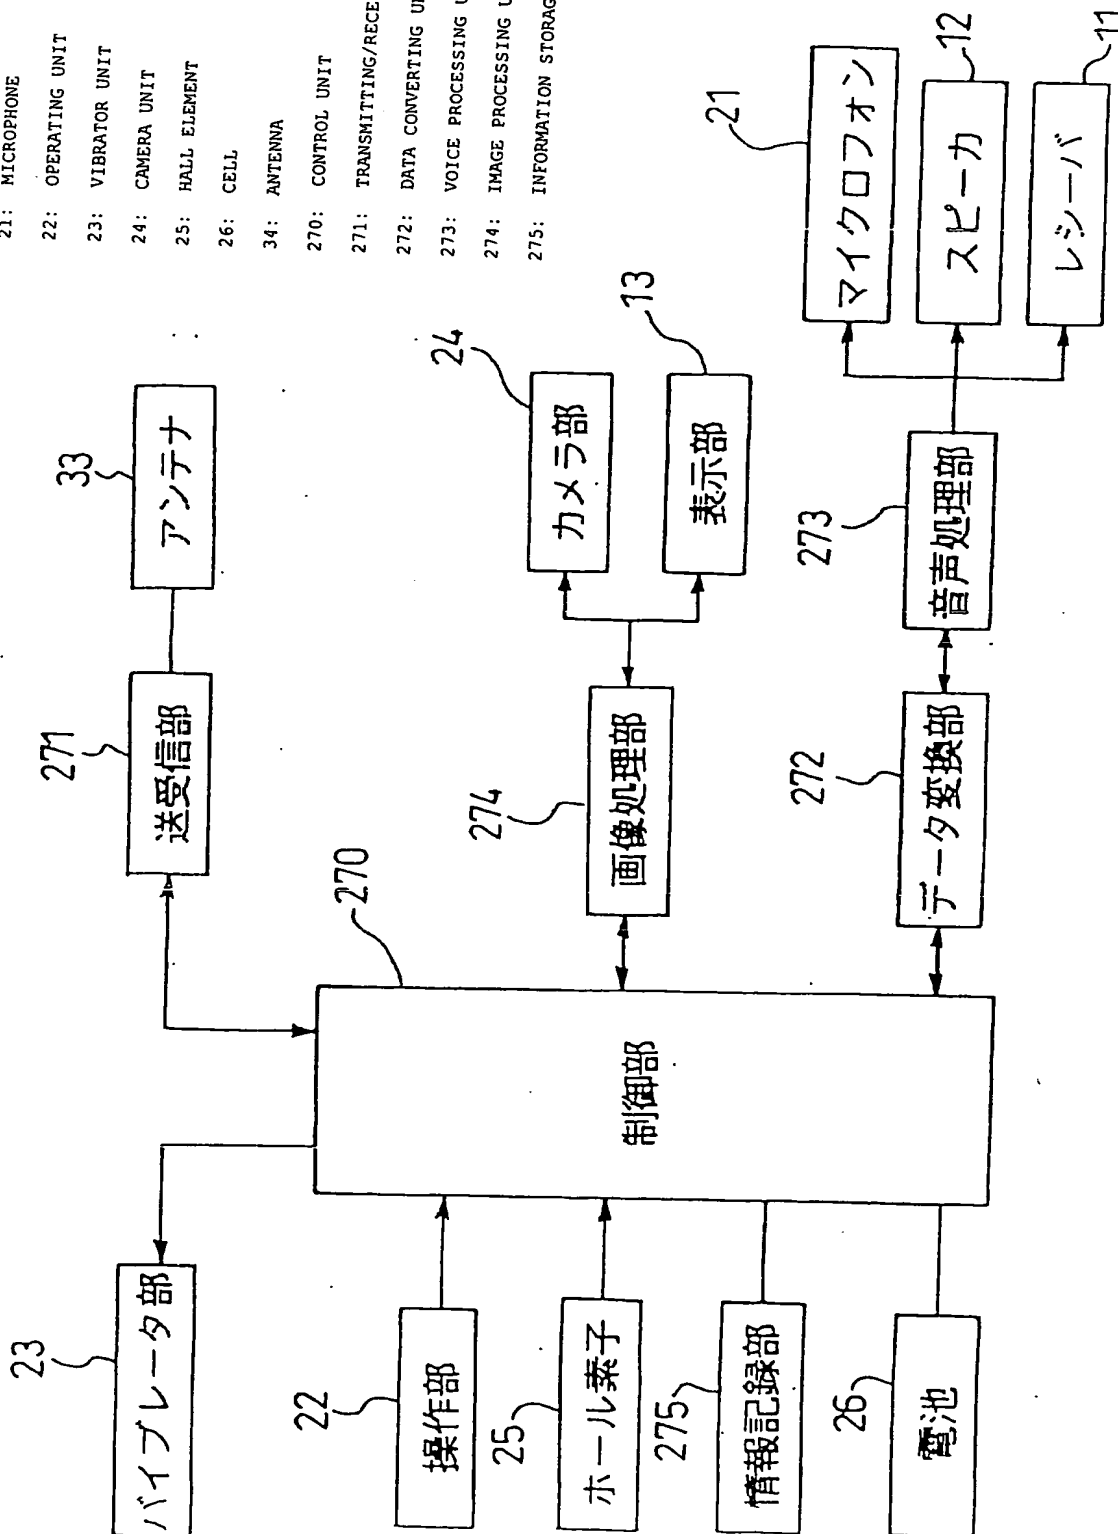


Fig. 8

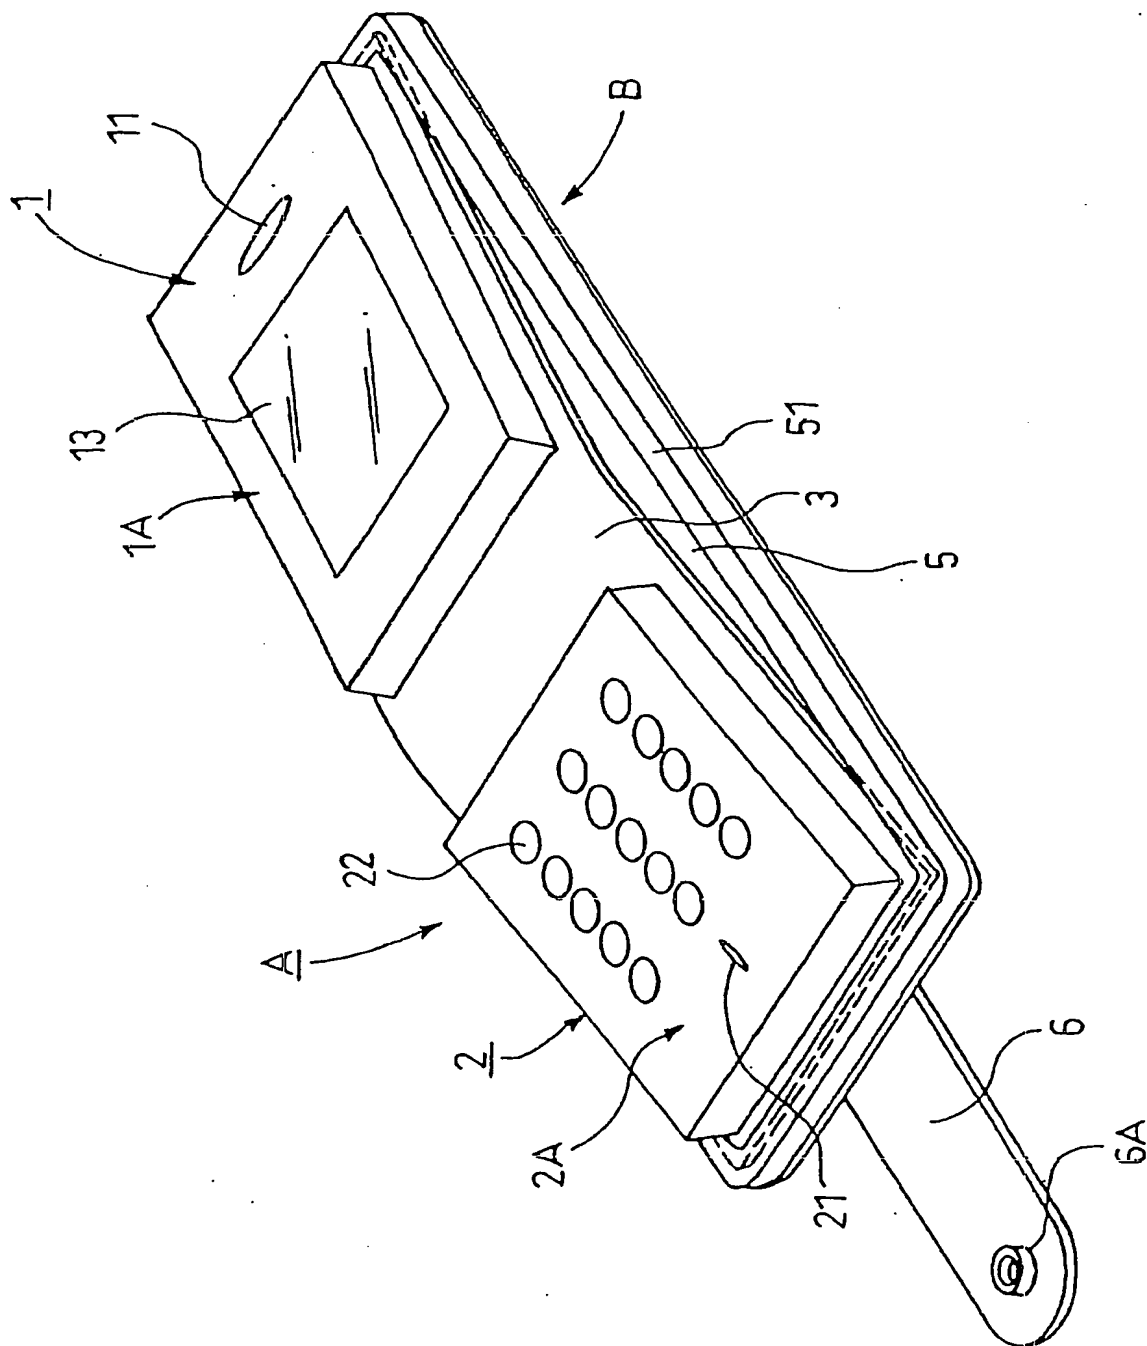


Figure 3 is a perspective view of a curved plate 32. The plate has two circular holes 320. Above each hole is a bolt 321, and below each hole is a cylindrical component 322. A cross-section A is indicated at the edge of the plate.

Fig. 11

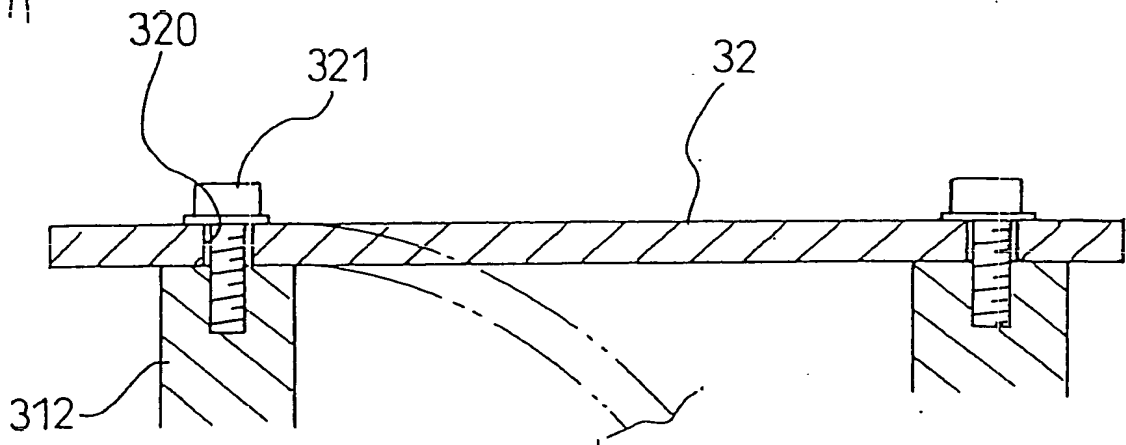


Fig. 12

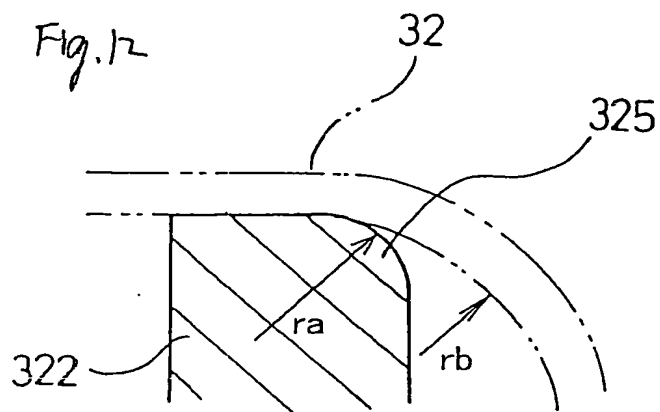


Fig. 13

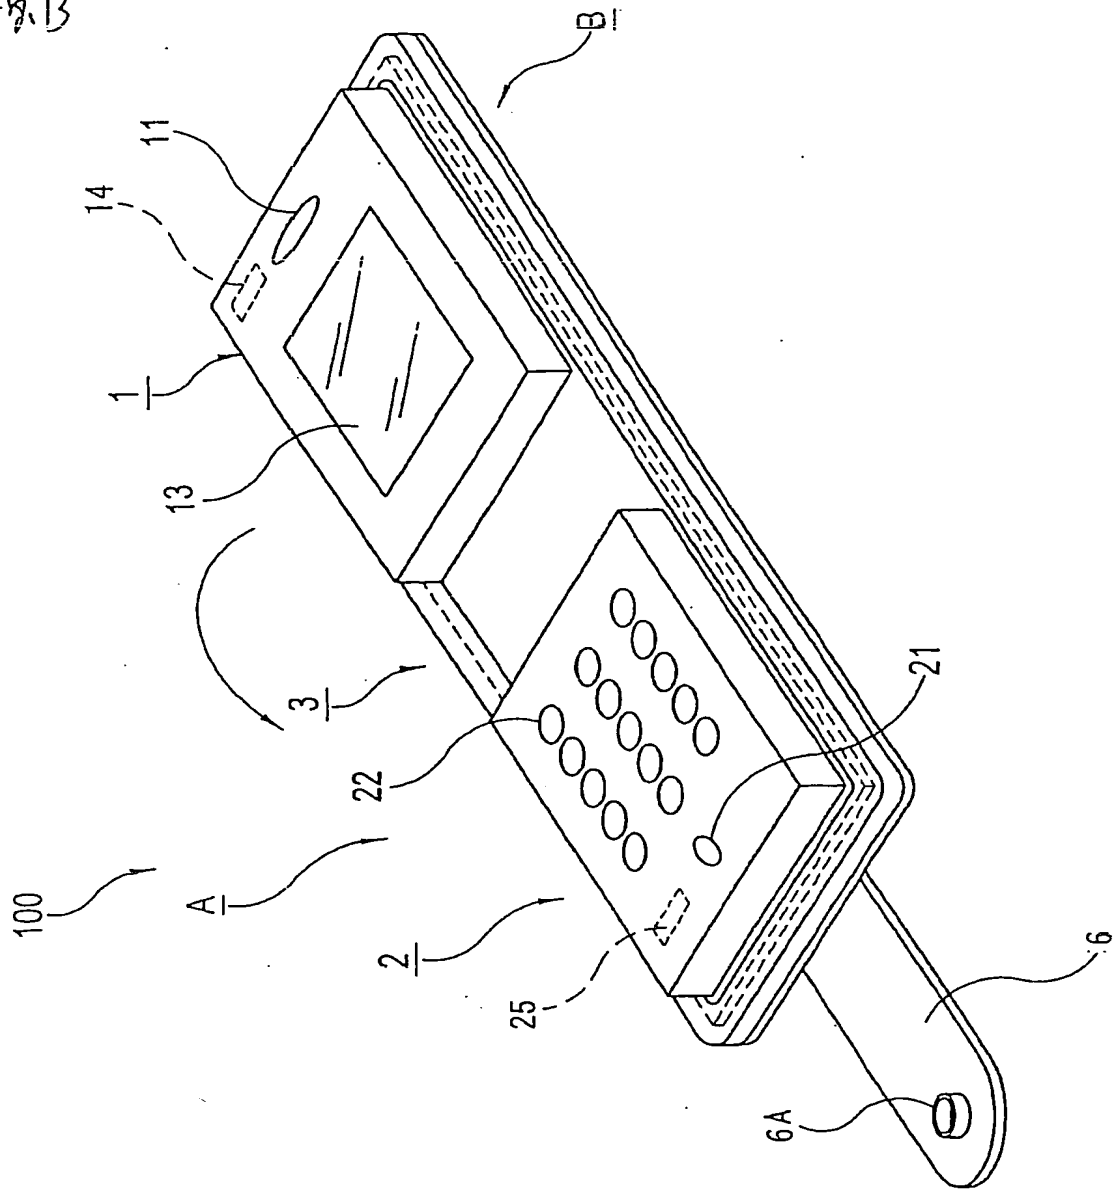


Fig. 14(A)

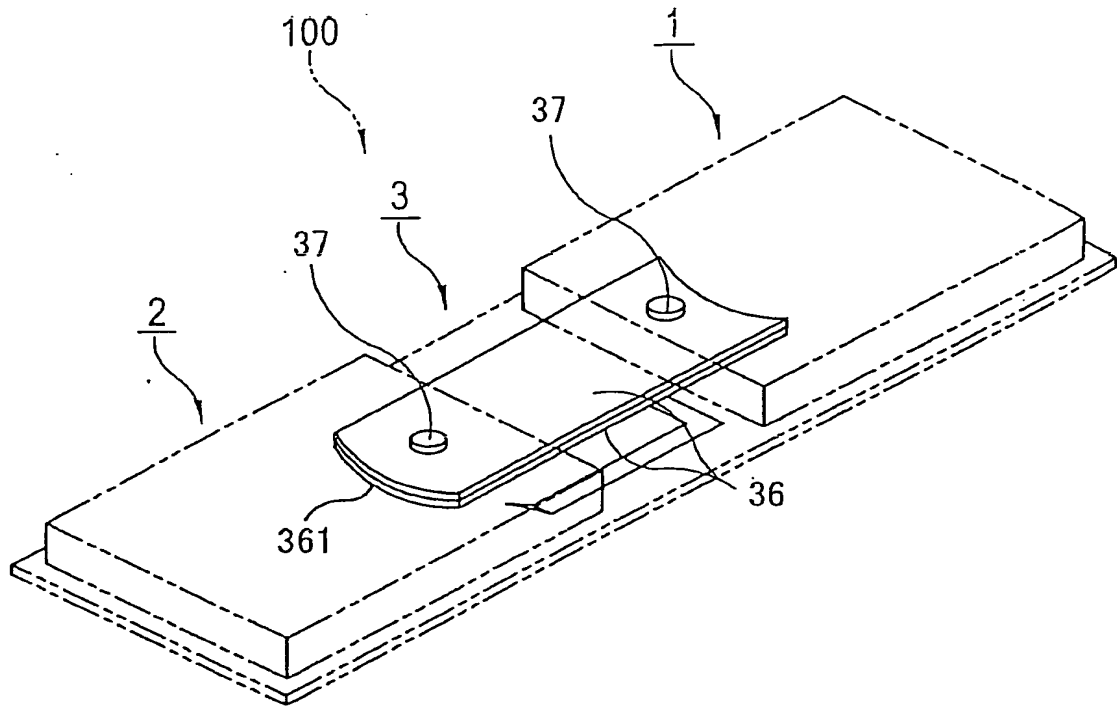


Fig. 14(B)

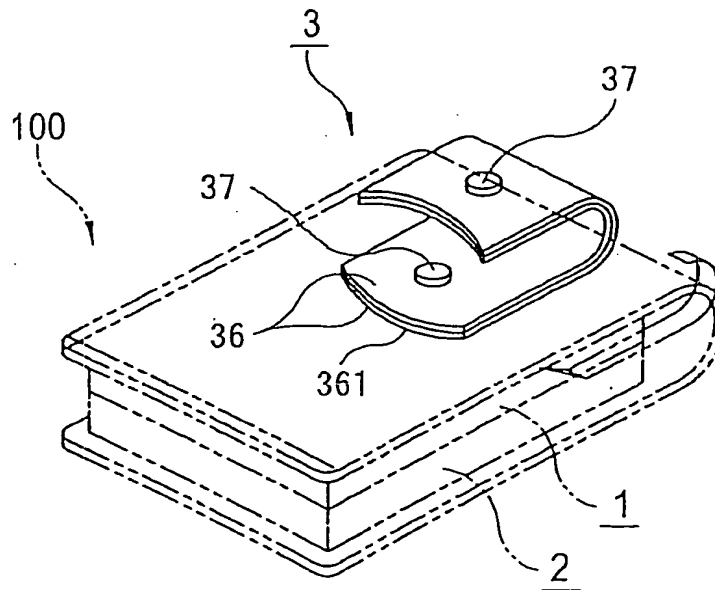


Fig. 5(A)

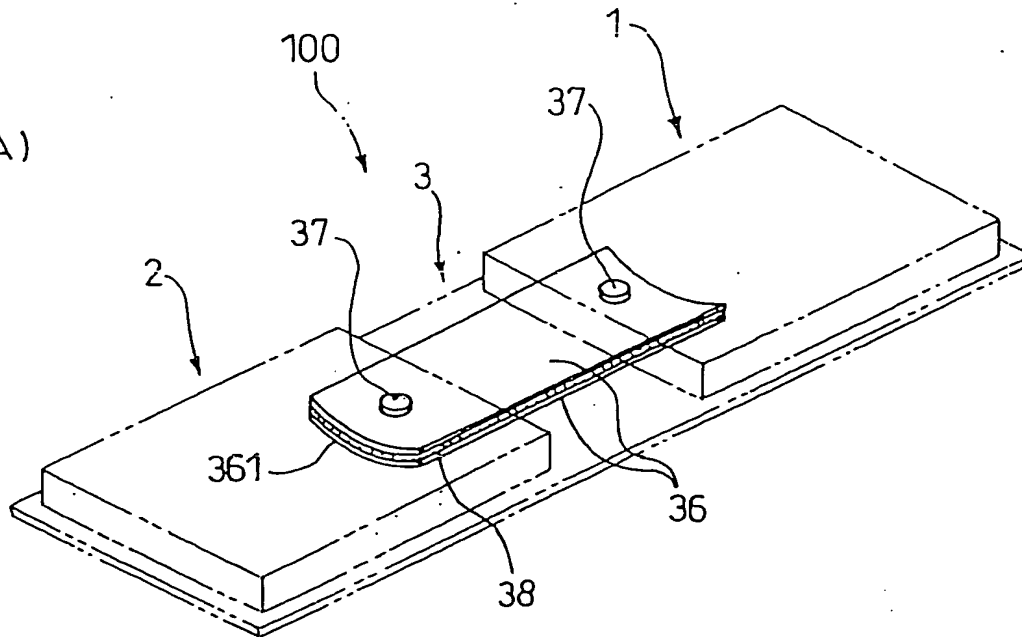


Fig. 5(B)

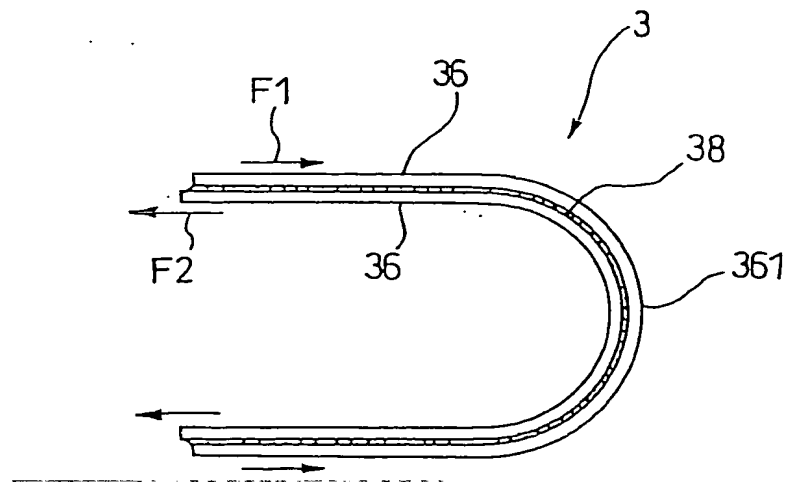


Fig. 16

